

Data Sheet of YY-WS19

Optical Fiber Distribution Box YY-WS19

1. Description:

The Model YY-WS19 FOSC is mainly used for optical fiber connection and protection. This kind of box is suitable for the connection of overhead, pipe and buried straight and branch. The box body and base are sealed with hoops and rubber. The closure casing is made of quality engineering plastics, and of good performance of anti-erosion against acid and alkali salt, anti-aging, as well as smooth appearance and reliable mechanical structure. The mechanical structure is reliable and has the performance of resisting wild environment and intensive climate changes and serious working environment. The splice trays (FOST) inside the closure are turn-able like booklets, and have adequate curvature radius and space for winding optical fiber to make sure the curvature radius for optical winding 40 mm. Each optical cable and fiber can be operated individually. The product can be opened again and reused after installation.



2. Features:


- (1) The optical fiber connector and the remaining optical fiber are stored in sequence, wherein the receiving tray can be matched with multiple layers, the capacity is large, and the receiving tray can be adjusted according to the number of cores connected by the optical cable.
- (2) Can play the role of protection and connection, the box is reinforced plastic, high strength, corrosion resistance, mature structure, strong sealing, convenient construction, etc.
- (3) Prevent material aging caused by heat, cold, light, oxygen and microorganisms in nature, and have excellent mechanical strength.
- (4) It is suitable for direct and branch connection of overhead, pipeline and direct laying of all kinds of structural optical cables.

3. Specification:

Item No	YY-WS19
Max	6PCS 48C Splicing Trays
Ports	3 inlets 3 outlets
Material	PC
Max. Number of Trays	6
Size	560mm(A)*240mm(B)*130mm(H)
Capacity	48C-288C
Weight (Kg)	About 5.7kg
Protection Grade	IP68
Air pressure	70~106KPa
Ambient temperature	-40°C~+80°C
Electric strength	15KV (DC)

Tensile force	> 1000N
Sealing of Shells	Silicon rubber
Box color	Black
Structure	Horizontal coupling box

4. Overall Dimension:

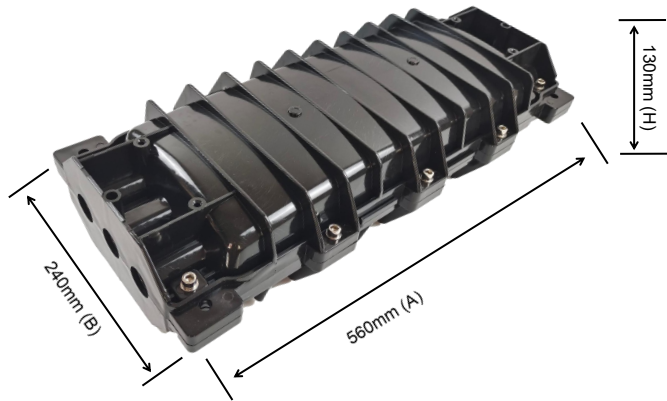

5. Ordering Information

Code Name	Capacity (single core)	Description
GD-48C	48Core	Fiber Optic Closure IN-LINE 3IN-3OUT 48Core
GD-96C	48Core	Fiber Optic Closure IN-LINE 3IN-3OUT 96Core
GD-288C	48Core	Fiber Optic Closure IN-LINE 3IN-3OUT 288Core

including splice sleeve, cassettes, sealing tape, mounting sets and accessories.

6. Type of installation:

